



Angelim Amargoso
Angelim Amargoso



Stemau S.p.A.

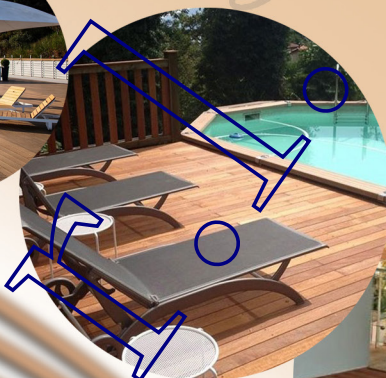

Wood Flooring Production

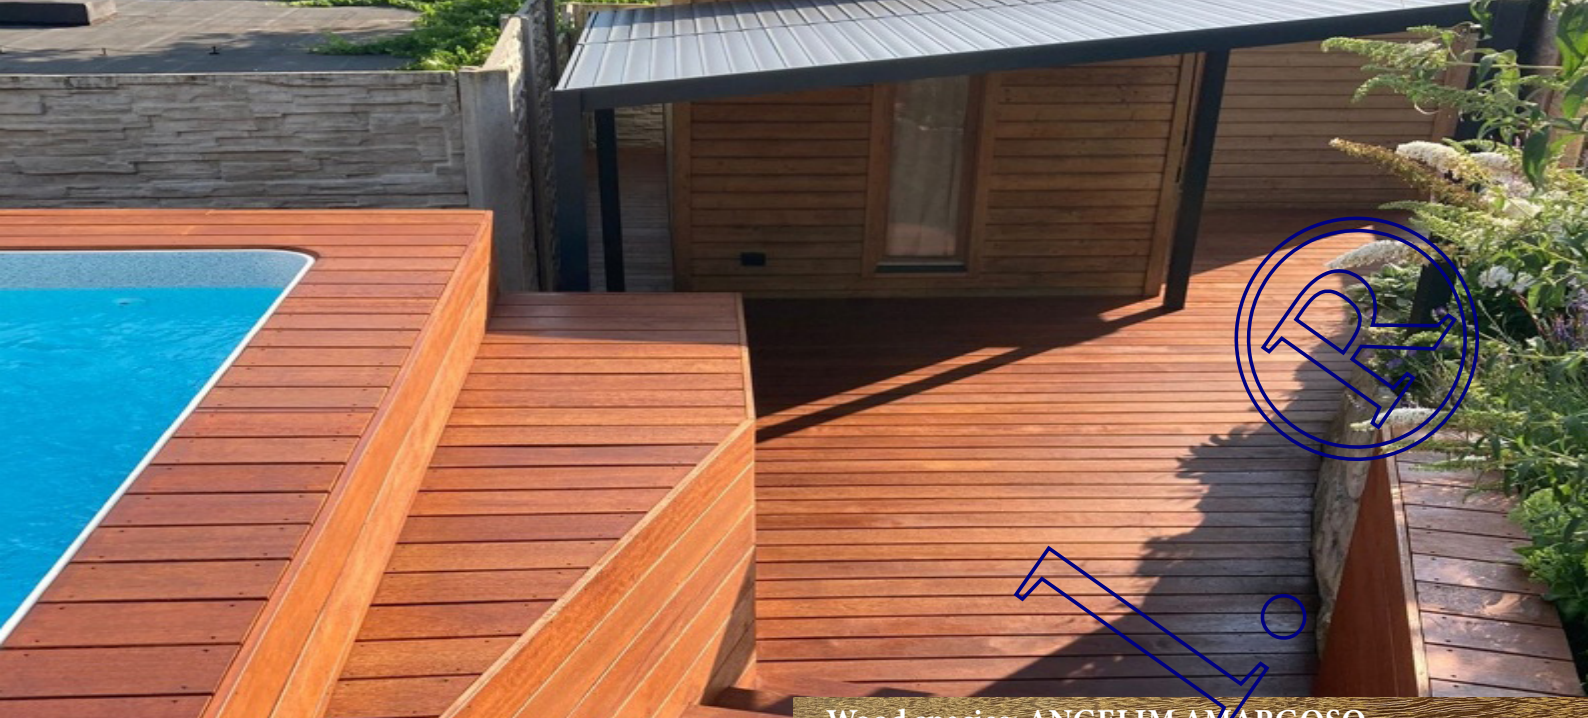

Wood species: ANGELIM AMARGOSO



Wood Flooring Production

Stemau S.r.l.

Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome

Warehouse and Showroom Via Refrancore, 26 00166 Rome

Factory Via Morsasco, 41 00166 Rome

Phone 0039 06 45.50.22.60 - info@stemausr.it - www.stemausr.it

VAT 01814361000 - Fiscal Code 07578980588

INFORMATION SHEET In compliance with the provisions of the law Legislative Decree no. 106/2005 "Regulations for consumer information"

EUROPEAN STANDARDS: UNI EN 11538

COMMERCIAL NAME: ANGELIM AMARGOSO

BOTANICAL NAME: HYMENOLOBIUM

FAMILY: FABACEAE

ORIGIN: SOUTH AMERICA

OXIDATION: MEDIUM

HARDNESS: MEDIUM

DENSITY: FRESH 900-1000 Kg/m³ - DRY 600-800 Kg/m³

DRYING: EASY AND WITHOUT DIFFICULTY, EVEN IF IT HAS A TENDENCY TO EMBARK

GROWTH AREA: BRAZIL

COLOUR: YELLOW-LIGHT BROWN, WARM AND AMBER. TENDING TO REDDISH

PROPERTY: STABLE, RESISTANT AND PERFORMING WOOD FOR OUTDOOR FLOORING, RESISTANT TO WATER, MOLD AND BACTERIA

ANGELIM AMARGOSO



Technical specifications of ANGELIM AMARGOSO for outdoor Decking Parquet

ESSENTIAL FEATURES	PERFORMANCE	TECHNICAL SPECIFICATION HARMONIZED
Density kg/m ³	600-800	
Reaction to fire	Dfl-S1	UNI EN 14342-2013 EN 13501-1
Thermal conductivity W/Mk	0,17	UNI EN 14342-2013

QUICK INSTALLATION GUIDE

Installation on aluminum or wooden joists with visible screws for profile **WITHOUT** symmetrical F/F lateral milling or with concealed clips for profile **WITH** symmetrical F/F lateral milling.
(For installation, in case of slopes, it is necessary to use jacks with adjustable support).

