



Wood Flooring Production

Stemau S.r.l.

Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome

Warehouse and Showroom Via Refrancore, 26 00166 Rome

Factory Via Morsasco, 41 00166 Rome

Phone 0039.06.45.50.22.60 - info@stemau.it - www.stemau.it

VAT 01814361000 - Fiscal Code 07578980588

INFORMATION SHEET In compliance with the provisions of the law Legislative Decree no. 206/2005 "Regulations for consumer information"



TYPE OF FORMAT FOR BIO ECO (IMMERSION DYED LIME) 2 LAYERS PRE-FINISHED PARQUET IDEAL FOR ALL INDOOR ENVIRONMENTS

DESCRIPTION: MALE/FEMALE INTERLOCKING BOARD, MICROBELLED ON 4 SIDES.

APPEARANCE CLASSES: SELECT (CIRCLE) - NATURE (TRIANGLE) - RUSTIC (SQUARE).

LAYING: FLOATING. IT IS RECOMMENDED TO PLACE A SHOCK ABSORBING MAT ON THE SUBSTRATE. IT IS NECESSARY TO ALWAYS PROVIDE, THROUGH THE USE OF WEDGES, A PERIMETER EXPANSION SPACE BETWEEN ALL THE WALLS AND THE FLOOR NOT LESS THAN 8-10 mm.

IT IS MANDATORY TO INSTALL EXPANSION JOINTS (PROFILES) IN ENVIRONMENTS WITH A WIDTH OR LENGTH OVER 8 METERS.

INSTALLATION METHOD: BRICK-PATTERN OR STRIP-PATTERN.

ASSEMBLY INDICATED ON: DRY AND LEVEL BASE. IT CAN ALSO BE LAYED ON RADIANT FLOORS (IF THE SYSTEM CONDITIONS ALLOW FOR IT AND COMPLY WITH THE REGULATIONS).

FINISHING: 6 OR 7 UV LAYERS SMOOTH VARNISH.

NOBLE WOOD THICKNESS: NOMINAL 3 OR 4 mm.

SUPPORT: BIRCH PLYWOOD OR SIMILAR (POPLAR, FIR, LARCH, EUCALYPTUS, ETC.) OR HDF.

MAINTENANCE: REMOVE DUST WITH A VACUUM CLEANER AND/OR ANTI-STATIC CLOTH. WASH WITH WELL-WRINKED DAMP CLOTH, USING NEUTRAL DETERGENT DILUTED IN WATER.

FEATURES: LONG LASTING (CAN BE SANDED EVERY 10-15 YEARS IF RUINED) - EXCELLENT THERMAL AND ACOUSTIC INSULATION - ECOLOGICAL - ALREADY FINISHED AND READY FOR INSTALLATION.

PACKAGE: 8 PIECES

DIMENSIONS: THICKNESS 14 OR 15 mm, WIDTH 130 OR 140 OR 150 OR 160 mm, LENGTH FROM 800 TO 2000 mm

EUROPEAN STANDARD: UNI EN 13489

MARKING: CE

PRODUCTION: 100% MADE IN ITALY

MAIN WOOD SPECIES USED FOR THIS FORMAT:


OAK






ROSEWOOD

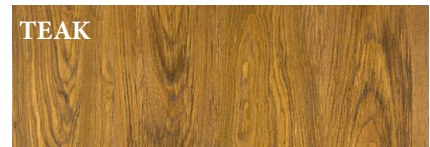

TEAK



SELECT  UNIFORM TONES, HOMOGENEOUS VEININGS, RANDOM SMALL KNURLS
NATURE  SLIGHT CHROMATIC SHADES, ACCENTUATED VEININGS, CONTAINED KNOTS
RUSTIC  MARKED TONE CHANGES, STRONG VEININGS, VISIBLE KNOTS AND CRACKS



Wood Flooring Production

Stemau S.r.l.

Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome

Warehouse and Showroom Via Refrancore, 26 00166 Rome

Factory Via Morsasco, 41 00166 Rome

Phone 0039.06.45.50.22.60 - info@stemau.it - www.stemau.it

VAT 01814361000 - Fiscal Code 0778980588

INFORMATION SHEET In compliance with the provisions of the law Legislative Decree no. 206/2005 "Regulations for consumer information"

Storage

The product must absolutely be stored with intact and closed packaging in covered and dry environments with a controlled temperature between 16°C and 23°C or at an average temperature of 20°C. If the product is stored outside of this interval before laying, it is advisable to acclimatize the material for the previous 48 hours in the same rooms where it will be laid.

Laying

It is advisable to let the material, in intact and closed packaging, acclimate for at least 24 hours in the environment in which it will be installed. Inspect all planks for damage prior to installation. If you have any doubts about the fit or finish of the product or if there is damage due to impact, tearing or abrasion, contact the Company. No complaints are accepted for floors that have been cut and/or laid.

To minimize the variation in tone, open several boxes at the same time, mix and lay the boards taking care to match them.

The installation substrate must be consistent, stable, dry, clean and well levelled.

For the new or pre-existing screed, refer to the UNI EN 11371 standard, that defines in detail the properties and the performance characteristics of cement screeds or screeds based on special binders or based on anhydrite (calcium sulphate), intended for installation by gluing parquet and wooden floors.

Cement screeds must be smooth, dry, clean and free from any foreign material such as dust, wax, solvents, paint, grease, oils and old adhesive residues. The surface must be hard and compact and free of dust or flaking.

New concrete must be dry. The maximum humidity level allowed during installation is 65%.

Therefore, avoid subjecting the floor to an environmental climate that is too dry or too humid, in order to avoid deformations, absolutely not dependent on production defects.

It can also be installed on radiant floors, if the system conditions allow for it and comply with the regulations.

For installation it is recommended to contact specialized personnel.

The product is designed, manufactured and tested to meet all specific standards, when installed in a workmanlike manner.

Wood species

Wood is a natural material, therefore differences in color and fiber between the different elements are to be considered typical of the product. Samples or photographic reproductions are intended as indicative and non-binding. The color of the wood, once exposed to light solar, generally tends to darken and become uniform. Some types of wood react clearly to changes in temperature, of humidity and sunlight and can undergo the oxidation process (color change).

Stemau S.r.l. operates and produces with the utmost respect for nature and the environment, using raw materials exclusively from areas and companies authorized to deforest, in order to maintain and protect, correctly and responsibly, natural communities and forests, according to rigorous environmental, social and economic standards.

Maintenance

For good maintenance of a wooden floor, observe the following precautions: provide a doormat at the entrance to the house, kept clean to remove dust and abrasive particles from the soles of the shoes; ordinarily remove dust with a broom fringes or electrostatic dust-catching cloth or by vacuum cleaner; regularly clean the floor with a cloth moistened with water and neutral, non-foaming floor detergent; never wash with boiling water and/or steam producing or non-steam producing appliances. Never use solvents, bleach or ammonia.

Avoid contact with any foaming product or substances, whether chemical or natural, that are abrasive, acidic and corrosive.

For extraordinary maintenance it is recommended to contact expert and qualified personnel who respect the general safety regulations.

Disposal

The flooring can't be dispersed in the environment, but entrusted to public waste disposal systems.

Warnings

It is absolutely forbidden to use the product as a structural component or in environments different from the ones indicated, change the product, use different ways of lay down respect to the ones indicated, use glues for fixing, use different clean product respect to the ones indicated. The Firm is not responsible for accident or damages as a result of inappropriate use of the products, as well as the even partial non-compliance with safety standards and intervention procedures.