





Wood Flooring Production

Stemau S.r.l.
Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome
Warehouse and Showroom Via Refrancore, 26 00166 Rome
Factory Via Morsasco, 41 00166 Rome
Phone 0039.06.45.50.22.60 - info@stemau.it - www.stemau.it
VAT 01814361000 - Fiscal Code 07778980588



VINYL FLOORING RECYCLED WOOD COLLECTION

TECHNICAL DATA SHEET In compliance with the provisions of the law Legislative Decree no. 206/2005 "regulations for consumer information"

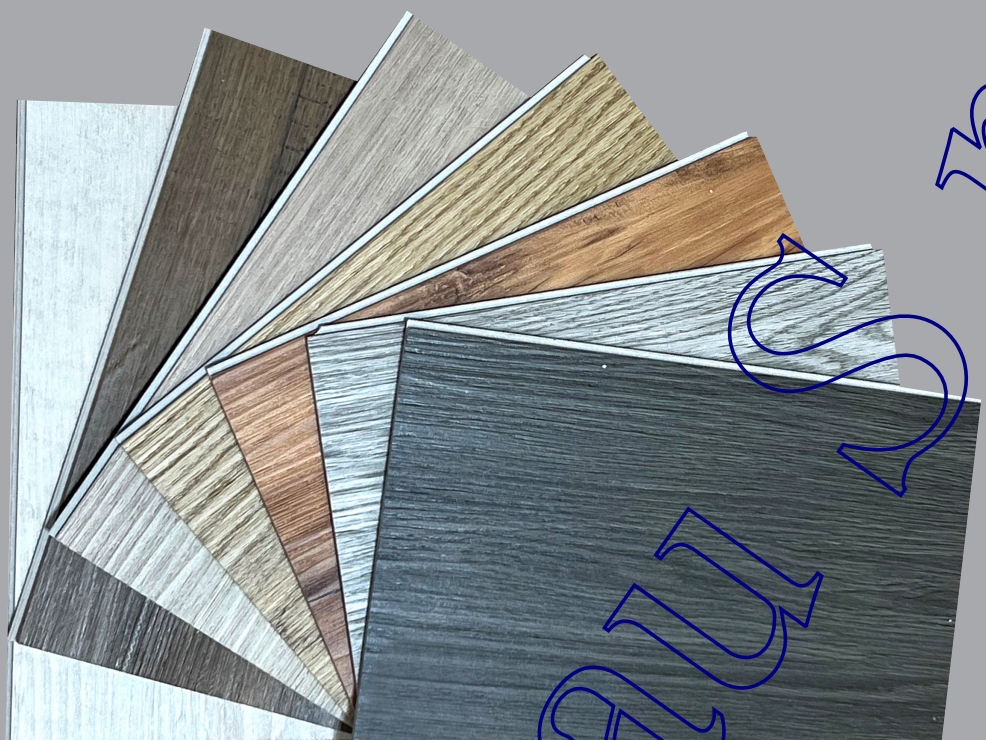

DESCRIPTION: SLAT OR PLANK
IN VINYL.
SPC: STONE POLYMER COMPOSITE
LAYER: UV
WEAR LAYER: $\pm 0,5$ mm
DECORATION: HD
INTERMEDIATE LEVEL: REINFORCED
WITH FIBERGLASS
BASE LAYER: STABILIZING PVC
FIXING SYSTEM: BY CLICK
PACKING: 10 BOARDS (2,233 m²)
PACKAGE WEIGHT: 18,80 Kg
USE: FOR INDOOR ENVIRONMENTS
ONLY
**ACCESSORIES FOR INSTALLATION AND
MAINTENANCE:** CUSHIONING MAT OR
INSULATING MAT WITH VAPOR BAR-
RIER, PROFILES, SPECIFIC DETERGENTS,
VINYL SKIRTING BOARD.

TAKE NOTE
THE PRODUCT DOES NOT COME WITH A
PRE-GLUED MAT.

EUROPEAN STANDARD: UNI EN ISO 10582:2012
MARKING: CE

The floating floor in SPC (Stone Polymer Composite) is a luxury vinyl floor, composed of an upper layer (walking surface), a decorative surface, which reproduces the grain and colors of the wood, and a vinyl support layer, joined together using a static press. It is produced 100% with recycled material, it is economical, sound-absorbing, non-slip, antibacterial, antistatic, long-lasting, resistant to water and humidity, insulating, easy to install and simple to maintain.. It is quick and easy to assemble, thanks to its click installation and is also suitable for "do it yourself" installation. It is not afraid of oxidation, does not stain or discolor with direct exposure to the sun. It is ideal for flooring all internal environments subject to high traffic, such as homes, shops, offices, hotels, gyms, restaurants, commercial areas. Furthermore, it is suitable for flooring humid environments, such as bathroom, kitchen, garage, attic, cellar, attic.

ABRASION RESISTANCE CLASS: AC5
USE CLASS: 23 - 33 (DOMESTIC - COMMERCIAL)



Wood Flooring Production

Stemau S.r.l.


Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome

Warehouse and Showroom Via Refrancore, 26 00166 Rome

Factory Via Morsasco, 41 00166 Rome

Phone 0039.06.45.50.22.60 - info@stemausrl.it - www.stemausrl.it

VAT 01814361000 - Fiscal Code 07578980588



VINYL FLOORING RECYCLED WOOD COLLECTION

Storage

The product must absolutely be stored with intact and closed packaging in covered and dry environments with a controlled temperature between 13°C and 29°C or at an average temperature of 21.1°C. If the product is stored outside of this interval before laying, it is advisable to acclimatize the material for the previous 48 hours in the same rooms where it will be laid.

Posa

It is advisable to let the material, in intact and closed packaging, settle for at least 24 hours in the environment in which it will be installed. Inspect all planks for damage before installation. If you have any doubts regarding the fit or finish of the product or if there is damage due to impacts, tears or abrasions, contact the Company. We do not accept complaints for floors that have been cut and/or laid. To minimize the variation in shade, open several boxes at the same time, mix and lay the boards, taking care to mix them. The installation is floating only. Never fix the slats to the bottom when using the floating installation method. For installation in areas larger than 250 m², an expansion channel of at least 16 mm must be provided along the perimeter. The installation substrate must be consistent, stable, dry, clean and well levelled. Do not install on wood bases that sit directly on concrete or on wood or plywood used on concrete. Cement screeds must be smooth, dry, clean and free from any foreign material such as dust, wax, solvents, paint, grease, oils and old adhesive residues. The surface must be hard and compact and free of dust or flaking. New concrete must be dry. The maximum humidity level allowed during installation is 65%. Even though the product is insensitive to humidity, it is important that it is controlled to avoid the formation of fungi and mould. Underfloor heating permitted is only hydraulic. Electric ones are therefore not permitted and approved. The product is quick and easy to assemble and can be installed with a click of a button. Due to its very low thickness it can also be installed on pre-existing floors, without having to cut the doors. It is simple to disassemble and is 100% recyclable. However, for installation it is recommended to contact specialized personnel. The product is designed, manufactured and tested to meet all specific standards, when installed in a workmanlike manner.

Composition

The product consists of: UV layer, wear layer, HD decoration, glass fiber reinforced intermediate layer, stabilizing PVC adhesive base layer.

Maintenance

For good maintenance of an SPC floor it is advisable to remove dust and dirt with a vacuum cleaner, or with a broom with soft bristles, or with an electrostatic dust-catching cloth and wash it with a soft cloth moistened with water and vinyl floor cleaner, without solvents or bleach or ammonia.

Avoid contact with any foaming product or substances, whether chemical or natural, that are abrasive, acidic and corrosive.

Do not use steam machines, as they can deform the floor or leave marks that are difficult to remove.

Set up a mat at the entrance to reduce dirt and debris from shoes.

Extraordinary maintenance must be carried out by specialized personnel who comply with general safety regulations.

Disposal

The flooring can't be dispersed in the environment, but entrusted to public waste disposal systems.

Warnings


It is absolutely forbidden to use the product as a structural component or in environments different from the ones indicated, change the product, use different ways of lay down respect to the ones indicated, use glues for fixing, use different clean product respect to the ones indicated. The Firm is not responsible for accident or damages as a result of inappropriate use of the products, as well as the even partial non-compliance with safety standards and intervention procedures..



Produzione Pavimenti in Legno

Stemau S.r.l.

Sede Legale e Showroom Via Pieve Ligura, 15 00168 Roma
Deposito e Showroom Via Refrancore, 26 00166 Roma
Stabilimento di Produzione Via Morsasco, 41 00166 Roma
Telefono 06.45.50.22.60 - info@stemausrl.it - www.stemausrl.it
P.I. 01814361000 - C.F. 07578980588



PAVIMENTO VINILICO COLLEZIONE RECYCLED WOOD

■ Advice after laying

- provide a doormat at the entrance to the home, kept clean, to remove dust and abrasive particles from the soles of the shoes
- thoroughly clean the soles of the shoes on the doormat
- clean the floor surface thoroughly with neutral detergent products specific for laminates, or using a well wrung out cloth moistened with water
- place the felt pads under the feet of the chairs and furniture
- falling sharp or otherwise pointed objects cause scratches and gouges
- the stay of animals could cause the formation of furrows, scratches, stains and halos
- for objects and furniture with wheels, make sure they are equipped with rubber wheels
- the fall of embers and open flames causes the formation of burns
- too low floor humidity causes shrinkage, too high humidity causes swelling (thermal expansion)
- in the event of a fall/spill of water or liquids in general on the floor, immediately remove the liquid with an absorbent cloth and then proceed with cleaning the stained area with a cloth slightly moistened with water

■ Cleaning and maintenance

For good maintenance of a vinyl floor, you observe the following precautions and tips

ORDINARY MAINTENANCE

- provide a doormat at the entrance to the house, kept clean, to remove dust and abrasive particles from the soles of the shoes
- thoroughly clean the soles of the shoes on the doormat
- ordinarily remove the dust with a mop or an electrostatic dust-catching cloth or with a vacuum cleaner
- usually wash the floor with a damp cloth (well wrung out) with water and a neutral or specific floor cleaner for laminate, non-foaming or aggressive
- never wash with boiling water and/or steam-producing appliances and never use solvents, bleach or ammonia
- avoid contact with any foamy product or substances, both chemical and natural, which are abrasive, acidic and corrosive

EXTRAORDINARY MAINTENANCE

After years and years of daily use, the floor may look worn or damaged.

For extraordinary maintenance of the walking surface, it is advisable to contact expert and qualified personnel, who comply with the general safety standards and who carry out the typical phases of removing and replacing damaged elements.